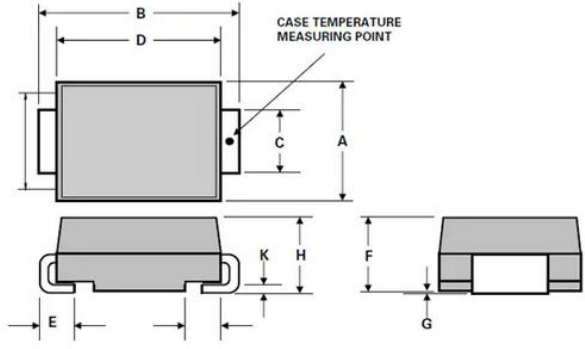


SMD Transient Voltage Suppressor Diodes

Primary characteristics		
Parameter	Value	Unit
V_R range nom.	5.0 to 440	V
Peak power	600	W

Features

- **SMB (DO-214AA)** case for easy automatic insertion.
- Pb-free and **RoHS** compliant
- Approx. weight: 0.1g / 0.0034oz
- Glass passivated junction
- Low inductance
- Solderable per MIL-STD-750, Method 2026
- Plastic package has underwriters laboratory flammability

Case dimensions									
									
SMB (DO-214AA)									
Unit	A	B	C	D	E	F	G	H	K
mm	3.60 -0.30 +0.35	5.3 -0.2 +0.3	2.10 -0.15 +0.10	4.30 -0.25 +0.30	1.20 -0.45 +0.40	2.20 -0.30 +0.25	0.10 -0.05 +0.10	2.30 ±0.35	0.30 -0.15 +0.11

Part numbering system		
SMBJ	24	A
↓	↓	↓
Series code	Reverse standoff voltage marking (see: Characteristics table)	Unidirectional: A Bidirectional: CA

Absolute maximum ratings and general electrical characteristics ($T_a = 25^\circ\text{C}$)			
Parameter	Symbol	Value	Unit
Peak pulse power dissipation ^{1) 2)}	P_{PPM}	600	W
Peak forward surge current ³⁾	I_{FSM}	100	A
Peak pulse current on 10/1000 μs waveform ¹⁾	I_{PPM}	Characteristics table	A
ESD voltage per IEC6100-4-2	Contact	V_{ESD1}	kV
	Air	V_{ESD2}	
Typical Junction Capacitance at $V_R=4\text{V}$, $f=1\text{MHz}$	C_j	390	pF
Typical thermal resistance junction to ambient	$R_{\theta JA}$	100	$^\circ\text{C/W}$
Operating junction temperature and storage temperature range	T_j, T_{stg}	-65 ~ 150	$^\circ\text{C}$
Notes:			
1) Non-repetitive current pulse, derated above $T_A=25^\circ\text{C}$			
2) Mounted on 5mm ² copper pads to each terminal			
3) Peak forward surge current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)			


Characteristics table (T_a = 25°C)

Part number (UNI)	Part number (BI)	Marking		Reverse stand off voltage	Breakdown voltage @I _T V _{BR}		Test current	Maximum clamping voltage @I _{PP}	Maximum peak pulse current	Maximum reverse leakage @V _R	Agency approval 
					MIN	MAX					
		UNI	BI	V _R V	V	V	I _T mA	V _C V	I _{PP} A	I _R μA	
SMBJ5.0A	SMBJ5.0CA	KE	AE	5.0	6.40	7.00	10	9.2	65.3	800	X
SMBJ6.0A	SMBJ6.0CA	KG	AG	6.0	6.67	7.37	10	10.3	58.3	800	X
SMBJ6.5A	SMBJ6.5CA	KK	AK	6.5	7.22	7.98	10	11.2	53.6	500	X
SMBJ7.0A	SMBJ7.0CA	KM	AM	7.0	7.78	8.60	10	12.0	50.0	200	X
SMBJ7.5A	SMBJ7.5CA	KP	AP	7.5	8.33	9.21	1	12.9	46.6	100	X
SMBJ8.0A	SMBJ8.0CA	KR	AR	8.0	8.89	9.83	1	13.6	44.2	50	X
SMBJ8.5A	SMBJ8.5CA	KT	AT	8.5	9.44	10.4	1	14.4	41.7	20	X
SMBJ9.0A	SMBJ9.0CA	KV	AV	9.0	10.0	11.1	1	15.4	39.0	10	X
SMBJ10A	SMBJ10CA	KX	AX	10	11.1	12.3	1	17.0	35.3	5	X
SMBJ11A	SMBJ11CA	KZ	AZ	11	12.2	13.5	1	18.2	33.0	1	X
SMBJ12A	SMBJ12CA	LE	BE	12	13.3	14.7	1	19.9	30.2	1	X
SMBJ13A	SMBJ13CA	LG	BG	13	14.4	15.9	1	21.5	28.0	1	X
SMBJ14A	SMBJ14CA	LK	BK	14	15.6	17.2	1	23.2	25.9	1	X
SMBJ15A	SMBJ15CA	LM	BM	15	16.7	18.5	1	24.4	24.6	1	X
SMBJ16A	SMBJ16CA	LP	BP	16	17.8	19.7	1	26.0	23.1	1	X
SMBJ17A	SMBJ17CA	LR	BR	17	18.9	20.9	1	27.6	21.8	1	X
SMBJ18A	SMBJ18CA	LT	BT	18	20.0	22.1	1	29.2	20.6	1	X
SMBJ20A	SMBJ20CA	LV	BV	20	22.2	24.5	1	32.4	18.6	1	X
SMBJ22A	SMBJ22CA	LX	BX	22	24.4	26.9	1	35.5	16.9	1	X
SMBJ24A	SMBJ24CA	LZ	BZ	24	26.7	29.5	1	38.9	15.5	1	X
SMBJ26A	SMBJ26CA	ME	CE	26	28.9	31.9	1	42.1	14.3	1	X
SMBJ28A	SMBJ28CA	MG	CG	28	31.1	34.4	1	45.4	13.3	1	X
SMBJ30A	SMBJ30CA	MK	CK	30	33.3	36.8	1	48.4	12.4	1	X
SMBJ33A	SMBJ33CA	MM	CM	33	36.7	40.6	1	53.3	11.3	1	X
SMBJ36A	SMBJ36CA	MP	CP	36	40.0	44.2	1	58.1	10.4	1	X
SMBJ40A	SMBJ40CA	MR	CR	40	44.4	49.1	1	64.5	9.3	1	X
SMBJ43A	SMBJ43CA	MT	CT	43	47.8	52.8	1	69.4	8.7	1	X
SMBJ45A	SMBJ45CA	MV	CV	45	50.0	55.3	1	72.7	8.3	1	X
SMBJ48A	SMBJ48CA	MX	CX	48	53.3	58.9	1	77.4	7.8	1	X
SMBJ51A	SMBJ51CA	MZ	CZ	51	56.7	62.7	1	82.4	7.3	1	X
SMBJ54A	SMBJ54CA	NE	DE	54	60.0	66.3	1	87.1	6.9	1	X
SMBJ58A	SMBJ58CA	NG	DG	58	64.4	71.2	1	93.6	6.5	1	X
SMBJ60A	SMBJ60CA	NK	DK	60	66.7	73.7	1	96.8	6.2	1	X
SMBJ64A	SMBJ64CA	NM	DM	64	71.1	78.6	1	103	5.9	1	X
SMBJ70A	SMBJ70CA	NP	DP	70	77.8	86.0	1	113	5.3	1	X
SMBJ75A	SMBJ75CA	NR	DR	75	83.3	92.1	1	121	5.0	1	X
SMBJ78A	SMBJ78CA	NT	DT	78	86.7	95.8	1	126	4.8	1	X
SMBJ85A	SMBJ85CA	NV	DV	85	94.4	104	1	137	4.4	1	X


Characteristics table ($T_a = 25^\circ\text{C}$)

Part number (UNI)	Part number (BI)	Marking		Reverse stand off voltage	Breakdown voltage @ I_T V_{BR}		Test current	Maximum clamping voltage @ I_{PP}	Maximum peak pulse current	Maximum reverse leakage @ V_R	Agency approval 
					MIN	MAX					
		UNI	BI	V_R	V	V	I_T	V_C	I_{PP}	I_R	
				V	V	V	mA	V	A	μA	
SMBJ90A	SMBJ90CA	NX	DX	90	100	111	1	146	4.1	1	X
SMBJ100A	SMBJ100CA	NZ	DZ	100	111	123	1	162	3.7	1	X
SMBJ110A	SMBJ110CA	PE	EE	110	122	135	1	177	3.4	1	X
SMBJ120A	SMBJ120CA	PG	EG	120	133	147	1	193	3.1	1	X
SMBJ130A	SMBJ130CA	PK	EK	130	144	159	1	209	2.9	1	X
SMBJ150A	SMBJ150CA	PM	EM	150	167	185	1	243	2.5	1	X
SMBJ160A	SMBJ160CA	PP	EP	160	178	197	1	259	2.3	1	X
SMBJ170A	SMBJ170CA	PR	ER	170	189	209	1	275	2.2	1	X
SMBJ180A	SMBJ180CA	PT	ET	180	201	222	1	292	2.1	1	
SMBJ190A	SMBJ190CA	PA	EC	190	211	233	1	308	2.0	1	
SMBJ200A	SMBJ200CA	PV	EV	200	224	247	1	324	1.9	1	
SMBJ210A	SMBJ210CA	PB	ED	210	237	263	1	340	1.8	1	
SMBJ220A	SMBJ220CA	PX	EX	220	246	272	1	356	1.7	1	
SMBJ250A	SMBJ250CA	PZ	EZ	250	279	309	1	405	1.5	1	
SMBJ300A	SMBJ300CA	QE	FE	300	335	371	1	486	1.3	1	
SMBJ350A	SMBJ350CA	QG	FG	350	391	432	1	567	1.1	1	
SMBJ400A	SMBJ400CA	QK	FK	400	447	494	1	648	0.9	1	
SMBJ440A	SMBJ440CA	QM	FM	440	492	543	1	713	0.9	1	
For bidirectional type having V_{RWM} of 10 volts and less, the I_R limit is double. For parts without A, the V_{BR} is $\pm 10\%$ and V_C is 5% higher than with A parts.											


Peak pulse power rating curve

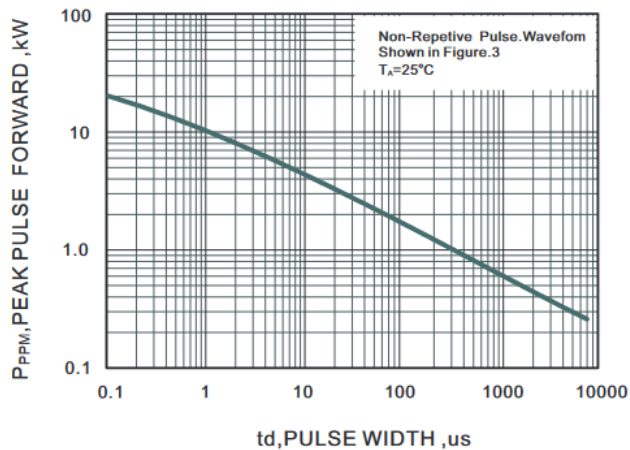


Pulse derating curve

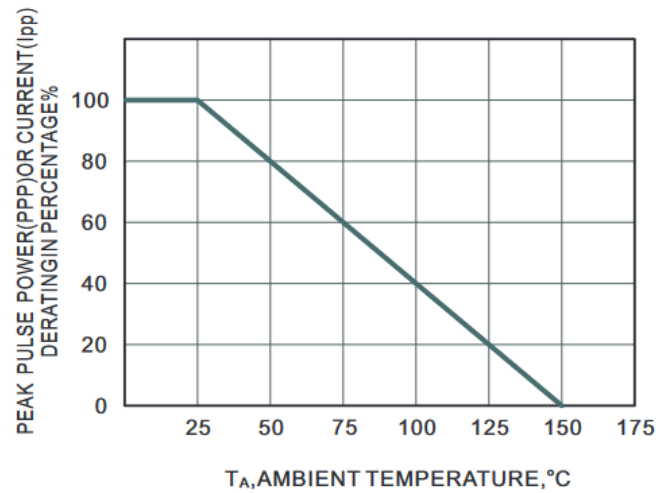


Pulse waveform

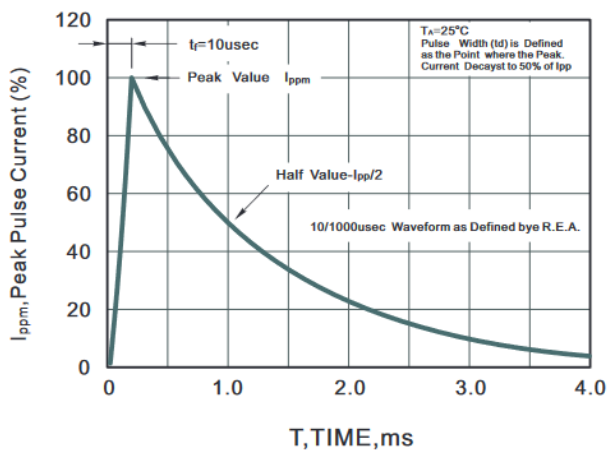

Maximum non-repetitive peak forward surge current

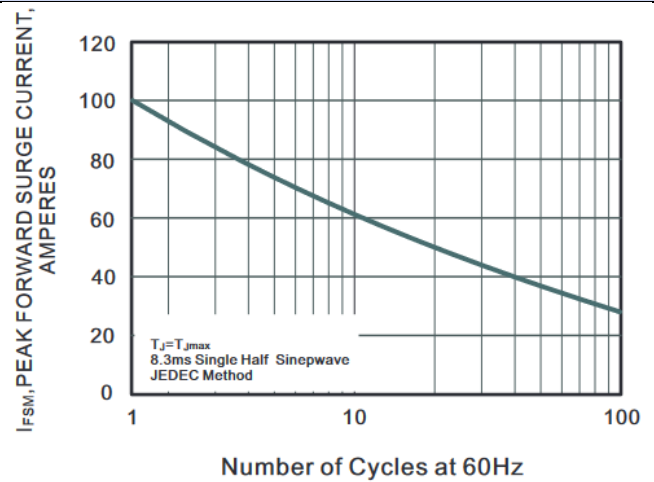

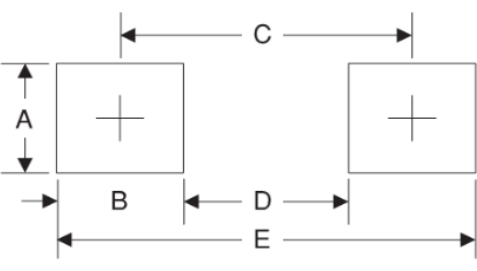Suggested soldering pad layout					
					
SMB (DO-214AA)					
Unit	A	B	C	D	E
mm	2.8	2.4	4.6	2.2	7.0

Ordering information			
Part number	Package	Shipping reel quantity	Dimensions
SMBJ5.0A(CA) ~ SMBJ440A(CA)	SMB (DO-214AA)	3 000 pcs / reel 30 000 pcs / box	--- 360 x 360 x 280 mm

Disclaimer

Akyga semi reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Akyga semi or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on Akyga semi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Akyga semi does not assume any liability arising out of the application or use of any product or circuit. Akyga semi products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Akyga semi. Customers using or selling Akyga semi components for use in such applications do so at their own risk and shall agree to fully indemnify Akyga semi and its subsidiaries harmless against all claims, damages and expenditures.