


Dimension: unit: mm

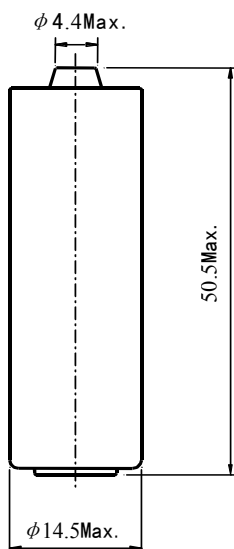

S: Standard termination
Special terminations can be made as requested.

Warning:

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


Note: any representation in this data sheet concerning performance, are for informational purposes only and are not construed as warranty either expressed or limited, for future performance.

MODEL NO.: ER14505M


SPECIFICATION: ($23 \pm 2^\circ\text{C}$)

Nominal capacity (2mA~2V):	2.2Ah
Rated voltage:	3.6V
Max constant current of discharge:	500mA
Max discharge current(pulse):	1000mA
Weight:	22g
Operating temperature range:	$-55 \sim 85^\circ\text{C}$

Discharge characteristics at $23 \pm 2^\circ\text{C}$

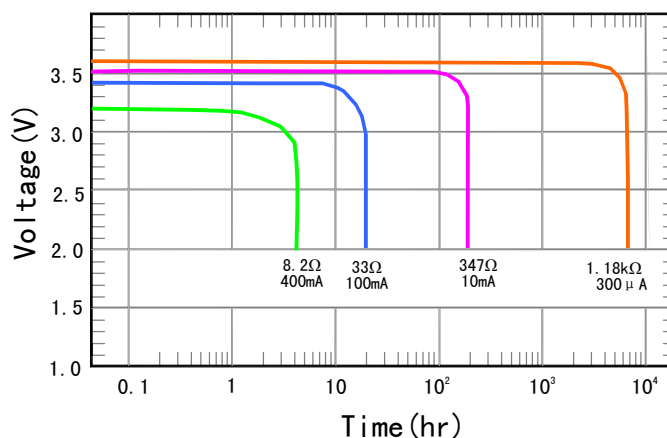

Capacity VS. Current

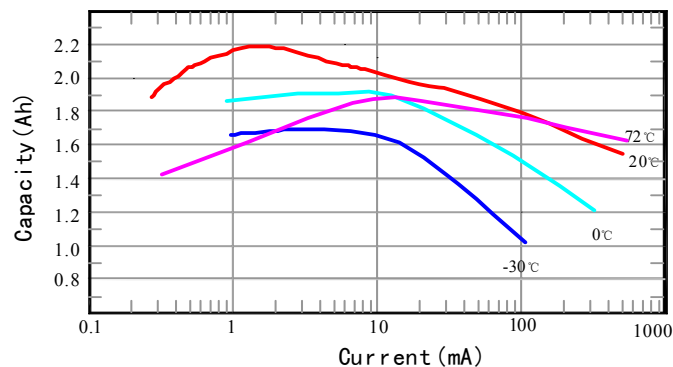

Voltage VS. Temperature

